
IS6CCE-H

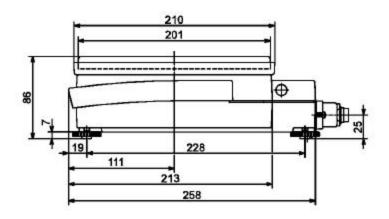

Meeting your needs in every weigh.

13

200

240

25kg or 55 lb

Optional (YDO54IS)

sartori

ja.	
Platform Size	8.5" x 8"
Dimensions (WxHxD)	9.4" x 5.8" x 5.8"
Platform Cable Length	3 meters or 9'
Platform	Stainless Steel
Base Construction	Epoxy coated alum.
Protection Rating	IP54
Net Weight	6.5kg or 14lb

SPECIFICATIONS:

Weighing Capacity	6.2kg or 13.6 lb
Readability	0.01g or 0.00002lb
Linearity	≤± 0.02g
Reproducibility	≤± 0.01g
Response Time	< 1.5 seconds
Operating Temp.	0 to +30°C
Force Motor Cell	620,000 digit
Calibration Weight	Internal
Data Output Speed	20 to 400 ms

IP54 Protection Rating

The IP54 protection rating let the scales withstand dust and moisture and protects against accidental spills and ingress of dust particles making them suitable for use in the industrial environment.

Connectable to Sartorius isi Indicators

Through an RS485 signal, the IS06BBE-S can be connected to an isi Indicator with it's standard 3 meter (9') cable, or up to 300 meters (900') where longer distance is required.

Ultra fast Response Time

You won't have to wait more than one second for a stable readout with this platform. With special menu codes activated, you can actually reduce the response time down to 800ms!

Connect directly to a computer

Overload Capacity

RS232 Interface

The Sartorius' IS digital weighing platforms can be connected directly to a computer when an optional RS232 converter is installed.

Standard Internal Calibration

Simply press one key to calibrate the platform at any time. Internal calibration is especially useful when the scale gets moved from one location to another, or when the temperature varies considerably. This saves the cost of purchasing calibration weights.

Fast Data Communication

Depending upon the menu setting you select in the setup parameters, data outputs can be sent up to 50 times a second

Sartorius Corporation 131 Heartland Boulevard Edgewood New York 11717 Toll Free: (800) 635-2906 (631) 254-4249 Fax (631) 254-4261

Sartorius Fax on Demand: (800) 551-3774		
This Document Number:	20913	
Related Documents	#	
Laboratory Catalog	1000	
Industrial Catalog	2000	
Calibration Catalog	80015	